

## SOLO7 NanoVue 'HD' Receiver

COFDM – Video, Audio Telemetry and IP Products

April 2016 Data Sheet



The Domo Tactical Communications (DTC) SOLO 7 NanoVue 'HD' Receiver is a fully portable digital diversity receiver. The enhanced faster microprocessor provides increased performance and responsiveness resulting in faster IP streaming. The NanoVue HD Receiver incorporates an extremely flexible decoding platform with low delay SD and HD H.264 decoding capability.

The NanoVue 'HD' receiver incorporates a high resolution daylight viewable video touch screen with digital diversity receiver, antennas with optional clip-on battery in a proven, durable and compact lightweight housing.

It is ideal for use as a confidence or monitoring receiver for tactical use, or for surveillance on the move, perimeter security and fire control.

Control is achieved through a touch screen interface or by connecting the unit to an IP network using the Ethernet interface provided. Rapid configuration in the field is supported via the DTC Field Controller (FCON).

The product can be supplied with an optional external rechargeable battery pack for rapid interchange, which provides at least four hours continuous use battery life. It can also run from an external DC supply.

The product has comprehensive on screen display diagnostic capability to show link quality, enabling users to optimise transmission performance. The touch screen allows the user to switch channels and perform basic configuration like frequency selection without the need for connection to a PC. Recording to SD card (*SD Narrowband only*) is also controlled via the touch screen.

NanoVue HD is ideal for tactical mobile situations providing decision makers with real time video feedback.

### Features

- Small size: 130 x 80 x 32 mm (unit only)
- H.264, MPEG-4 ASP and MPEG-2 decoding in one unit
- Low power
- Fully featured 8/7/6/2.5/1.25\*/0.625\* MHz demodulation
- Maximum ratio combining antenna diversity
- IP video streaming (RTSP and UDP) \*
- Internal recording to 32GB SD card \*
- Ethernet control
- High Definition 5" display 800x 480 res.
- Easy to use touch screen
- Optional clip-on 4 hour battery pack with internal charger circuit

# SOLO7 NanoVue 'HD' Receiver

COFDM – Video, Audio Telemetry and IP Products

April 2016 Data Sheet

## Specification

### Inputs

RF Input from ANT 1	SMA Female 50 Ohm
RF Input from ANT 2	SMA Female 50 Ohm
Power	Lemo

### Outputs

S-video, RS232 Data	Hirose
Stereo Line Level Audio and Composite Video	Lemo
Headphone Audio Out	3.5 mm Headphone Jack
Ethernet control/streaming	Lemo

### RF

Frequency Bands	340 to 470 MHz 1.00 to 1.50 GHz 1.65 to 2.38 GHz 2.17 to 2.50 GHz 3.10 to 3.70 GHz 4.40 to 5.00 GHz 5.50 to 5.95 GHz
Tuning Step Size	250 kHz

### Control

Local	Touch Screen Interface & Field Controller (FCON)
Remote	Ethernet

### Physical

Size	130x80x32mm
Weight	493g
Temperature	-10 to +45 °C

### DC Input

6V to 16V, 9W consumed

### Modulation

DVB-T Bandwidth	8/7/6 MHz
DVB-T Guard	1/32, 1/16, 1/8, 1/4
DVB-T FEC	1/2, 2/3, 3/4, 5/6
DVB-T Modulation	QPSK, 16QAM, 64QAM

DVB-T Sensitivity	-95 dBm
Narrowband Bandwidth	2.5 / 1.25* / 0.625* MHz
Narrowband Guard	1/8, 1/16
Narrowband FEC	1/3, 2/3
Narrowband Modulation	QPSK, 16QAM
Narrowband Sensitivity	-95 to -104 dBm

### Video

Line Standard	PAL / NTSC
Resolution	H.264 SD 704, 528, 480, 352
Resolution (HD)	1280*1080i @30/29.97/25 1280*720p @60/59.94/50
Coding Mode	H.264 SD/HD 4:2:0 MPEG2 SD 4:2:2 or 4:2:0
Video latency	80ms typical
Screen	480x272 pixels

### Audio

Output Line	Level
Sample Rate	48 kHz
Format MPEG Audio	384 to 64kb/s

### Product Codes:

Please see configurator table on the following page.

Products are available to security users in licensed frequency bands. Encryption licences are subject to export control. These products are not approved for use by unlicensed users. Commercial products are available if used in appropriate licensed frequency bands.

**DTC - Solent**  
Fusion 2,1100 Parkway  
Whiteley, Hampshire  
PO15 7AB, UK  
T: +44 1489 566 750

**DTC - Tampa**  
3845 Gateway Center Blvd Ste 360  
Pinellas Park  
FL 33782, USA  
T: +1 727 471 6900

**DTC - Randers**  
Haraldsveg 64B  
DK-8960  
Randers SØ  
Denmark  
T: +45 8791 8100

**DTC - Brazil**  
Av. das Nações Unidas  
12551- 17ºandar - Sala 1725  
04578-903  
São Paulo  
T: +55 11 3443 7545

## SOLO7 NanoVue 'HD' Receiver

COFDM – Video, Audio Telemetry and IP Products


April 2016 Data Sheet

Family: Receiver Product: SOLO7

**Export of Encrypted Products is Subject to United Kingdom Regulatory Export Controls**

### DTC Sales Code

Please enter required codes

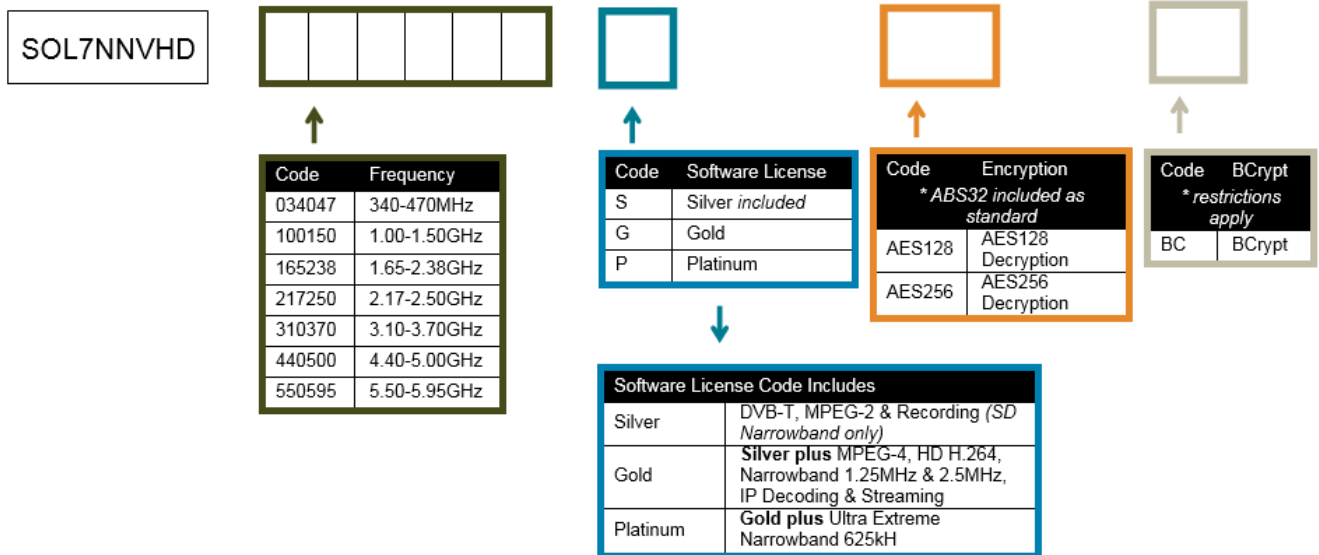

Product Code Includes	
CA0002	12V Power Cable
CA0122	AV Cable BNC/Phono
CA0063	3 <sup>rd</sup> gen Control Cable
CA0505	Ethernet Cable
CA2396	BNC to SDI Cable
2 Low Gain Omni Antennas (dBi & frequency bands vary)	

Compatible Products (sold separately)	
SOL4MTX	Transmitter
SOL5TX	Transmitter
SOL7NTX	Transmitter
SOL4DCAM	DropCam Transmitter

Related Accessories (sold separately)	
NNVBAT	Clip-on Battery Pack & Charger
AP006673	AU Power Lead for Battery Charger
AP004634	EU Power Lead for Battery Charger
AP000481	UK Power Lead for Battery Charger
AP001483	US Power Lead for Battery Charger
NNVNCS	Night Vision Clip-on Screen
FCON	Field Controller

**DTC - Solent**  
Fusion 2,1100 Parkway  
Whiteley, Hampshire  
PO15 7AB, UK  
T: +44 1489 566 750

**DTC - Tampa**  
3845 Gateway Center Blvd Ste 360  
Pinellas Park  
FL 33782, USA  
T: +1 727 471 6900

**DTC - Randers**  
Haraldsveg 64B  
DK-8960  
Randers SØ  
Denmark  
T: +45 8791 8100

**DTC - Brazil**  
Av. das Nações Unidas  
12551- 17ª andar - Sala 1725  
04578-903  
São Paulo  
T: +55 11 3443 7545