

DTC BluSDR™-200

DTC BluSDR™ 2x15W Module

Overview:

As part of the DTC BluSDR™ family of products, BluSDR™-200 is designed for either mobile or fixed site applications, particularly suitable for drone platforms operating in extra-long range applications up to 200km.

Based around DTC's SOL8SDR (software defined radio) architecture and offering a full 2x15W of output power, BluSDR™-200 provides bidirectional point-to-point COFDM RF communications (for two radios), or optional IP Mesh to allow up to 144 nodes in a self-healing network using DTC's industry leading MeshUltra-X™ waveform.

BluSDR™-200 includes a rich set of interface options including Ethernet, USB, serial data, audio and dual HD-SDI video inputs.



Features and Benefits:

- 2x15W COFDM transceivers, 30W total
- Ideal for extra long range applications up to 200km
- Rugged IP66 design for environmental resistance
- Standard bidirectional point-to-point COFDM RF communications included
- Optional IP Mesh upgrade to support up to 144 nodes
- Optional AES128/256 encryption (accredited to FIPS140-2 for MeshUltra™ waveforms)
- USB support for peripherals such as 3G/4G/Wi-Fi dongles
- RNDIS support for Ethernet over USB
- Data capacity up to 90Mbps in 20MHz channel bandwidth
- Built-in video encoders
- Interlink mode for enhanced capability and large scale systems
- 64GB built-in storage

Product Information:

Product Options

BLUSDR-200-xxxxyy-B	BlueSDR-200 2x15W Boxed
---------------------	-------------------------


xxxxyy denotes frequency, see over

Product Includes

CA3791	Souriau 3-way circular to banana plugs power cable
--------	--

Accessory Options (sold separately)

AP000481	UK IEC power supply cable for use with CA3958
AP001483	US IEC power supply cable for use with CA3958
AP004634	EU IEC power supply cable for use with CA3958
AP007192	AU IEC power supply cable for use with CA3958
CA3958	Souriau 3-way circular to 24V PSU
CA3959	Souriau 3-way m-f power extension
NETR-HPMB-AS	High power antenna mounting bracket and spacer
SOL8SDI	HDMI or composite video to SDI converter

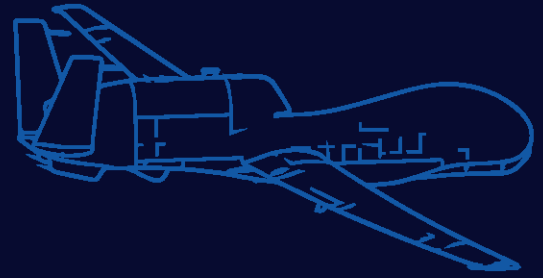

DTC BluSDR™-200

DTC BluSDR™ 2x15W Module

Technical Specification:

Interfaces

COFDM RF interfaces	N-Type x 4 (2 x Tx/Rx, 2 x Rx)
Power	3-way Souriau UTS7103P
Ethernet0/1	RJ45 x 2
Control and data	22-way Amphenol 38999 series 3
SDI/HD-SDI 1/2	BNC female 75Ω x 2
USB	Type A

COFDM Transceivers

RF power	15W (42dBm) per output, 30W total
Power step	0.25dB incremental control
Tuning step	125kHz step
Bandwidth	1.25, 1.5, 1.75, 2.5, 3.0, 3.5, 5.0, 6.0, 7.0, 8.0, 10.0MHz (all modes) 12.0, 14.0, 16.0, 20.0MHz (MeshUltra only)
Mesh capacity	87Mbps MeshUltra
Carrier modulation	BPSK/QPSK/16QAM/64QAM* (adaptive)
FEC rate	FEC1/2, FEC2/3 (adaptive)
Receive sensitivity	-98dBm (BW 2.5MHz/QPSK 1/2)

Video

Video input	Two video streams Max total throughput of 1920x1080p30 Currently both video input resolutions must be identical
SDI input formats	1920x1080i 60/59.94/50Hz 1920x1080p 30/29.97/25/24/23.97Hz 1920x1080psf 30/29.97/25/24/23.97Hz 1280x720p 60/59.94/50Hz 720x576i 50Hz or 720x480i 59.94Hz
H.264 compression	AVC / H.264 / MPEG-4 Part 10 High profile level 4.0
Coding options	Horizontal scaling of 3/4, 2/3, 1/2, 1/4 Vertical scaling of 1/2, 1/4 Sub-frame rate of 1/2, 1/4, 1/8, 1/24
Encoder delay	1s to 10ms (mode dependent)
Encoder bitrates	0.25Mbps to 32Mbps

Audio

Talkback audio input	High gain microphone stereo pair or talkback
Digital audio input	SD/HD-SDI digital stereo pair
Sample rate	16kHz-48kHz
Coding modes	4 channels stereo or mono MPEG Audio Layer 1 64-448kbps MPEG Audio Layer 2 32-384kbps MPEG Audio Layer 3 8-256kbps

Data Interface

RS232/RS485 bi-directional data (shared with user camera control)	1k2 to 115k2 baud switchable with UDP and TCP routing protocol
---	--

Encryption

Standard	DES
Licensed	AES128/256 (subject to export control)

Power

DC input	10-32V (28V nominal)
Power consumption	120W typical (200W peak)


Physical

Dimensions	H 254mm, W 210mm, D 71mm
Weight	5kg approx.

Environment

Sealing	IP66 minimum
Temperature range	-20°C to +50°C

DTC BluSDR™

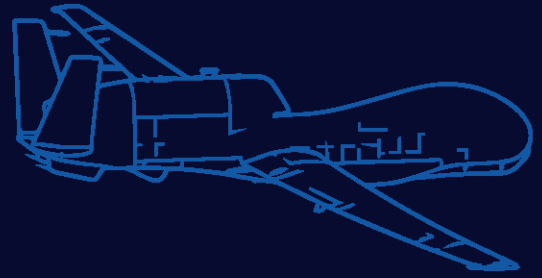

DTC BluSDR™-200

DTC BluSDR™ 2x15W Module

Technical Specification (cont.):

Frequency

230250	2.30-2.50GHz
420440	4.20-4.40GHz

License Options

Point-to-point link capability included as standard

BLUSDR-MESH	IP Mesh upgrade for BluSDR products
BLUSDR-IAS	Interference Avoidance Scheme for Mesh
*AES128TX	AES 128-Bit Encryption
*AES256TX	AES 256-Bit and AES 128-Bit Encryption

* Accredited to FIPS140-2 for MeshUltra™ waveforms

Export of encrypted products is subject to regulatory export controls.

For further information contact your Sales Account Manager, one of our Regional Sales Offices, or email solent.enquiries@domotactical.com

DTC – Herndon (Headquarters)
2303 Dulles Station Boulevard
Suite 205
Herndon, VA
20171, USA

T: +1 800 665 4648

DTC – Tampa
3845 Gateway Centre Boulevard
Suite 360
Pinellas Park, FL
33782, USA

T: +1 727 471 6900

DTC – Solent
Fusion 2, 1100 Parkway
Solent Business Park
Whiteley, Hampshire
PO15 7AB, UK

T: +44 1489 566 750

DTC – Randers
Haraldsvej 64B
DK-8960
Randers SØ
Denmark

T: +45 8791 8100

DTC – Singapore
21 Media Circle
Infinite Studios #05-06
Singapore
138562

T: +65 6339 0508