



DTC BluSDR™-6


DTC BluSDR™ Module

Overview:

As part of the DTC BluSDR™ family of products, BluSDR™-6 is designed specifically for size and weight critical UxV applications, and is particularly suitable for small drone platforms operating in short range applications up to 6km in range.

Based around DTC's SOL8SDR (software defined radio) architecture and offering up to full 2x200mW output power (frequency dependent), BluSDR™-6 provides bidirectional point-to-point COFDM RF communications (for two radios), or optional IP Mesh to allow up to 144 nodes in a self-healing network using DTC's industry leading MeshUltra-X™ waveform.

With two USB interfaces capable of supporting USB cameras and headsets as well as Wi-Fi, cellular and Ethernet dongles, BluSDR™-6 can also be connected to a range of host devices using RNDIS Ethernet over USB connectivity.



Features and Benefits:

Up to 2x200mW COFDM transceivers, 400mW total (frequency dependent)

Ideal for short range applications up to 6km

Standard bidirectional point-to-point COFDM RF communications included

Optional IP Mesh upgrade to support up to 144 nodes

Optional AES128/256 encryption (accredited to FIPS140-2 for MeshUltra™ waveforms)

USB support for peripherals such as 3G/4G/Wi-Fi dongles

128GB built-in storage

RNDIS support for Ethernet over USB

Compact packaging with ultra-miniature connectors

Low power consumption, typically 4W not including camera

Exceptionally small size and weight

Available as a core PCB or a boxed module

Product Information:

Product Codes

BluSDR-6-xxxxyy	BluSDR-6 Core PCB
BluSDR-6-xxxxyy-NC	BluSDR-6 Core PCB (no cables)
BluSDR-6-xxxxyy-B	BluSDR-6 Boxed
BluSDR-6-xxxxyy-B-NC	BluSDR-6 Boxed (no cables)

xxxxyy denotes frequency, see over


Product Includes

CA3740	5-way JST to USB A socket cable
CA3742	5-way JST to USB micro socket cable
CA4004	4-way Molex to 2-way Micro-Fit power cable
CA4017	2-way Micro-Fit to banana plugs power cable
CA3903 x 2	MMCX to SMA plug cable 200mm

Accessory Options (sold separately)

*ANT1-100150	1dBi omni antenna SMA 1.0-1.5GHz
*ANT2SMA-200250	2dBi omni antenna SMA 2.0-2.5GHz
AP007377	USB A to micro USB B cable
CA3752	SMA jack to MMCX plug cable 100mm
CA3983	5-way JST to USB Ethernet adaptor
CA4005	2-way Micro-Fit to 7.4V slimline battery
CA4006	2-way Micro-Fit to 8.4V 1.3A battery charger
CA4016	2-way Micro-Fit to 12V 2A DC mains adapter
SA4525	Heat sink clamp
SOL8SDR-M-CACLAMP-50	Cable clamp for 50mm length BluSDR
SOL8SDR-M-CACLAMP-56	Cable clamp for 56mm length BluSDR

*Two antennas required per module

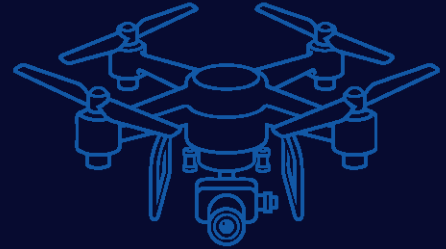

DTC BluSDR™-6

DTC BluSDR™ Module

Technical Specification:

IO

RF COFDM transceiver 1	MMCX (female 50Ω)
RF COFDM transceiver 2	MMCX (female 50Ω)
Power input	Molex 4-way 1.25mm
USB1 control and download	JST 5-way 1mm
USB2 control and download	JST 5-way 1mm
GPIO	JST 6-way 1mm

COFDM Transceivers

RF power (frequency dependent)	100mW (+20dBm) per output, 200mW total 200mW (+23dBm) per output, 400mW total
Power step	0.25dB incremental control
Tuning step	125kHz
Bandwidth	1.25, 1.5, 1.75, 2.5, 3.0, 3.5, 5.0, 6.0, 7.0, 8.0, 10.0MHz (all modes) 12.0, 14.0, 16.0, 20.0MHz (MeshUltra only)
Mesh capacity	Up to 87Mbps MeshUltra
Carrier modulation	BPSK/QPSK/16QAM/64QAM (adaptive)
FEC rate	FEC1/2, FEC2/3 (adaptive)
Receive sensitivity	-98dBm (BW 2.5MHz/QPSK 1/2)

Encryption

Standard	DES
Licensed	*AES128/256 (subject to export control)

Power

DC input	6V to 18V reverse polarity protected
Power consumption (excluding cameras)	3W typical (2x100mW) 4W typical (2x200mW)

Storage

Medium	Internal microSD 128GB
--------	------------------------

Physical (Core PCB)

Dimensions (120170/167235)	56mm x 48mm x 7.7mm
Weight (120170/167235)	26g approx.
Dimensions (210250)	50mm x 45mm x 7.7mm
Weight (210250)	24g approx.

Physical (Boxed)

Dimensions (120170/167235)	56mm x 54mm x 11mm
Weight (120170/167235)	62g approx.
Dimensions (210250)	50mm x 54mm x 11mm
Weight (210250)	60g approx.

Environment

Temperature range	-20°C to +50°C with additional cooling
Humidity	Less than 85% non-condensing

Frequency Options

120170	1.20-1.70GHz 2x100mW
167235	1.67-2.35GHz 2x200mW
210250	2.10-2.50GHz 2x200mW

License Options

Point-to-point link capability included as standard

BLUSDR-MESH	IP Mesh upgrade for BluSDR products
BLUSDR-IAS	Interference Avoidance Scheme for Mesh
*AES128TX	AES 128-Bit Encryption
*AES256TX	AES 256-Bit and AES 128-Bit Encryption

* Accredited to FIPS140-2 for MeshUltra™ waveforms

Export of encrypted products is subject to regulatory export controls.

For further information contact your Sales Account Manager, one of our Regional Sales Offices, or email solent.enquiries@domotactical.com

DTC – Herndon (Headquarters)
2303 Dulles Station Boulevard
Suite 205
Herndon, VA
20171, USA

T: +1 800 665 4648

DTC – Tampa
3845 Gateway Centre Boulevard
Suite 360
Pinellas Park, FL
33782, USA

T: +1 727 471 6900

DTC – Solent
Fusion 2, 1100 Parkway
Solent Business Park
Whiteley, Hampshire
PO15 7AB, UK

T: +44 1489 566 750

DTC – Randers
Haraldsvej 64B
DK-8960
Randers SØ
Denmark

T: +45 8791 8100

DTC – Singapore
21 Media Circle
Infinite Studios #05-06
Singapore
138562

T: +65 6339 0508