

# NETNode2x15W-5RH


## NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

### Overview:

Phase 5 is the latest generation of DTC's NETNode IP Mesh Radio family offering built-in dual HD video encoders and MIMO capability for our highest ever data capacities. IP radios can be combined in a fluid self-forming, self-healing mesh network containing up to 144 nodes depending on operating mode.

The NETNode 5RH is DTC's highest power Mesh product and provides up to 30W total RF power output over two transmit ports for extreme long range applications. The 5RH is ideal for extended outdoor deployment and includes on board video encoding with twin HD-SDI video inputs.

Interoperable with DTC's Phase 3 and 4 Mesh allowing simple upgrade in the field, the NETNode-5RH adds flexibility and ease of use as nodes can be integrated into existing infrastructure, reducing cost and making it easy to expand any network.

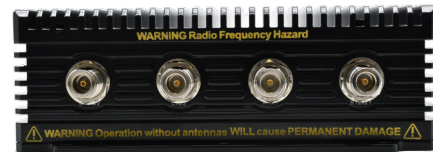

### Features and Benefits:

2 x 15W RF transmitters (up to 30W total power)

Self-forming, self-healing Mesh architecture

Ideal for use for wide area coverage and multi-hop, mobile applications such as robotics

Low latency IP communication

Data capacity up to 90Mbps in 20MHz channel bandwidth

Configurable RF bandwidth between 1.25MHz and 20MHz

Interlink mode for enhanced capability and large scale systems

64Gb of on-board storage with store & forward functionality

Optional AES128/256 encryption (accredited to FIPS140-2 for MeshUltra™ waveforms)

Mission Commander compatible

### Product Information:

#### Product Includes

CA2585	Microphone/headphone and control/debug screened cable 1m
CA3791	Souriau 3-way circular to banana plugs power cable

#### Accessory Options (sold separately)

CA3958	Souriau 3-way circular to 24V PSU
CA3959	Souriau 3-way m-f power extension
NETR-HPMB-AS	High power NETNode mounting bracket and antenna spacers
MISCDRTAC	Mission Commander Tactical application for desktop or tablet - refer to datasheet
MCS	Mission Commander Strategic advanced client/server application - refer to datasheet
SOL8SDI	HDMI or composite video to SDI converter

# NETNode2x15W-5RH

## NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

### Technical Specification:

#### Interfaces

COFDM RF interfaces	N-Type x 4 (2 x Tx/Rx, 2 x Rx)
Power	3-way Souriau UTS7103P
Ethernet0/1	RJ45 x 2
Control and data	22-way Amphenol 38999 series 3
SDI/HD-SDI 1/2	BNC female 75Ω x 2
USB	Type A

#### IP Interface

Ethernet	100/1000Base-T
IP address allocation	DHCP dynamic IP addressing/static IP

#### RF Interfaces

Antenna A	Channel 1 receive only
Antenna B	Channel 1 switched transmit/receive
Antenna C	Channel 2 receive only
Antenna D	Channel 2 switched transmit/receive

#### RF and Modulation

Output frequency	Frequency variant dependent
Tuning step size	125kHz step
Output power	15W per channel max (30W total) - modulation up to 16 QAM (SQT5) 10W per channel max (20W total) - configured for 64QAM Support (SQT6) Power adjustable in 0.25dB steps
Bandwidth in MHz (dependent on operating mode)	1.25, 1.5, 1.75, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 7.0, 8.0, 10.0, 12.0, 14.0, 16.0, 20.0
Mesh capacity	Up to 87Mbps MIMO*, 17Mbps standard Mesh
Modulation	COFDM 360 carrier modulation
Carrier modulation	BPSK/QPSK/16QAM/64QAM* (adaptive)
FEC rate	FEC1/2, FEC2/3 (adaptive)
Receive diversity	Maximum ratio combining
Receive sensitivity	-98dBm (BW 2.5MHz/QPSK 1/2)

\* 64QAM @ 2x10W Output. For 16QAM at 2x15W output, maximum is 62Mbps.

#### Typical Range

NLOS light urban	4km †
LOS (e.g. ground to air)	300km †

† Dependent on antenna height and gain

#### Streaming

Format	UDP multicast/unicast RTSP/RTP/UDP multicast/unicast ONVIF Profile S
MJPEG	TCP/HTTP

#### Video

Video input	Two video streams Max total throughput of 1920x1080p30 Currently both video input resolutions must be identical
SDI input formats	1920x1080i 60/59.94/50Hz 1920x1080p 30/29.97/25/24/23.97Hz 1920x1080psf 30/29.97/25/24/23.97Hz 1280x720p 60/59.94/50Hz 720x576i 50Hz or 720x480i 59.94Hz
Composite input formats	PAL NTSC
H.264 compression	AVC / H.264 / MPEG-4 Part 10 High profile level 4.0
Coding options	Horizontal scaling of 3/4, 2/3, 1/2, 1/4 Vertical scaling of 1/2, 1/4 Sub-frame rate of 1/2, 1/4, 1/8, 1/24
Encoder delay	1s to 10ms (mode dependent)
Encoder bitrates	0.25Mbps to 32Mbps

#### Audio

Talkback audio input	High gain microphone stereo pair or talkback
Digital audio input	SD/HD-SDI digital stereo pair
Sample rate	16kHz-48kHz
Coding modes	4 channels stereo or mono MPEG Audio Layer 1 64-448kbps MPEG Audio Layer 2 32-384kbps MPEG Audio Layer 3 8-256kbps

#### Store and Forward Options

Storage format	SD card interface (Secure Digital card) - not user accessible
Record options	Continuous or triggered (Milestone)
Files download	From web user interface/RTSP
Video and audio clip size	30 seconds

#### Encryption

Standard	DES
Licensed	AES128/256 (subject to export control)

# NETNode2x15W-5RH

## NETNode IP Mesh Radio Phase 5 (Robust High Power 30W)

### Technical Specification (cont.):

#### Open Audio Comms Channel (shared voice channel)

Multi-user audio comms channel	Microphone level/headphone interface
Compression	G726 32kbit audio 8kHz sampling and mute

#### Data Interface

RS232/RS485 bi-directional data (shared with user camera control)	1k2 to 115k2 baud switchable with UDP and TCP routing protocol
-------------------------------------------------------------------	----------------------------------------------------------------

#### Camera Interface

User camera type	Two HD-SDI or SD-SDI
User camera control	Mission Commander using VISCA, PELCOD or PELCOP User supplied desk controller (requires RS232/RS485 interface)

#### Triggers

Trigger source	Video motion detection Brightness
Trigger action	Enable Mesh Record

#### Control

Local control	LEDs power and Mesh status
Remote control	Web user interface Mission Commander

#### Power

DC input	12-32V (28V nominal)
Power consumed	120W typical (200W peak)

#### Physical

Dimensions	H 254mm, W 210mm, D 71mm
Mounting options base unit	Through hole screws
Mounting options adaption plate	Post mounting kit
Weight	5kg approx.

#### Environment

Sealing	IP66 minimum
Temperature range	-20°C to +50°C

#### Frequency

230250	2.30-2.50GHz
420440	4.20-4.40GHz

#### Software License Code

Silver (included)	SIMO Mesh, MIMO Mesh, Multi Mesh, Ultra-Low Bandwidth, Recording, Streaming, DES Encryption
Gold	Silver plus SD H.264 Encoder, Interference Avoidance
Platinum	Gold plus HD H.264 Encoder, Low Bitrate Encoding, Point to Multipoint
L2BRIDGE-NETNode2x15W-5RH	Transparent L2 Bridging Mode
SNAPSHOTS-NETNode2x15W-5RH	Triggered JPEG stills with timestamps
#AES128NN	AES 128-Bit Encryption
#AES256NN	AES 256-Bit and 128-Bit Encryption

# Accredited to FIPS140-2 for MeshUltra™ waveforms

Export of encrypted products is subject to regulatory export controls.

For further information contact your Sales Account Manager, one of our Regional Sales Offices, or email [solent.info@domotactical.com](mailto:solent.info@domotactical.com)

AMERICA  
T: +1 571 563 7077

UK  
T: +44 1489 566 750

DENMARK  
T: +45 8791 8100

UAE  
T: +971 0 44 53 72 01

SINGAPORE  
T: +65 6339 0508

AUSTRALIA  
T: +61 8 8305 0311